


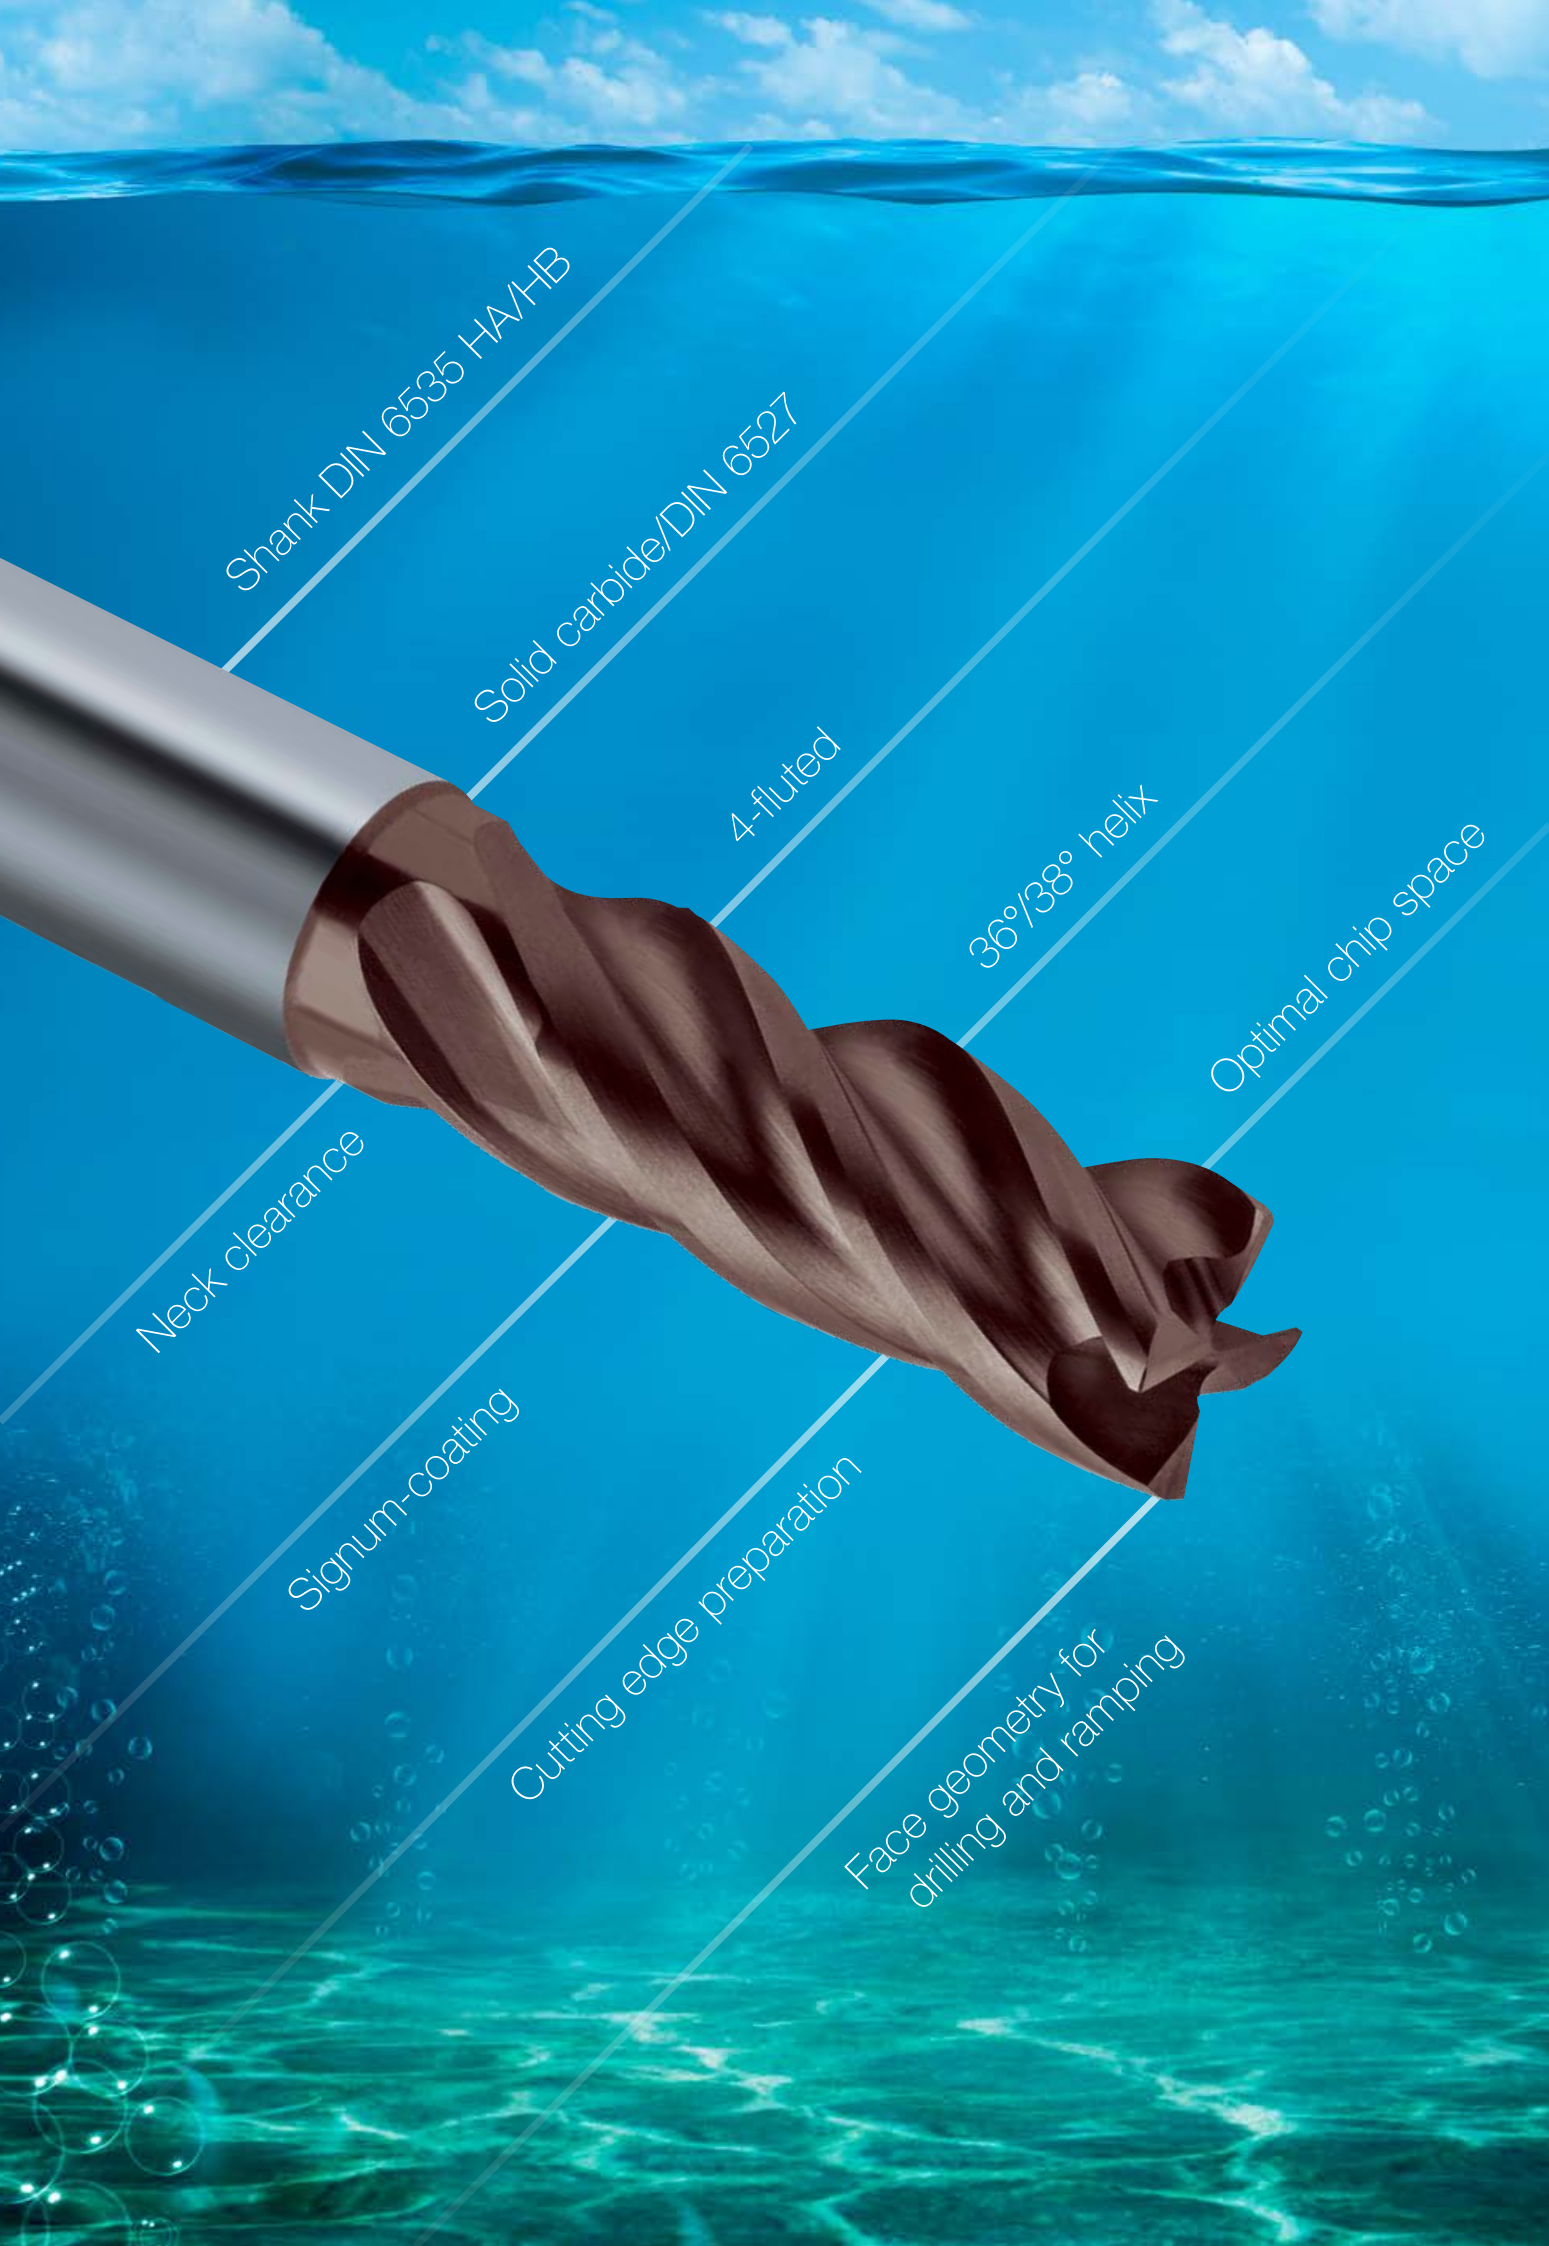

RF 100 DIVER-Set	Undersize diameter	Guh. no.	6755-1.0	6754-1.0
RF 100 DIVER-Set	Full size diameter	 Guh. no.	6755-2.0	6754-2.0

Undersize diameter

Content: 5 pieces
Guhring no. 6737 (shank HA) respectively
Guhring no. 6736 (shank HB)
in the following dia.: 5.7 / 7.7 / 9.7 / 11.7 / 15.6

Undersize diameter for mating grooves
and interpolated corner radii and contours

Full size diameter

Content: 5 pieces
Guhring no. 6737 (shank HA) respectively
Guhring no. 6736 (shank HB)
in the following dia.: 6.0 / 8.0 / 10.0 / 12.0 / 16.0



RF 100 DIVER		Guh. no.		6737	6736
DIN 6527	N				
Tool material		Solid carbide			
Surface finish		Signum		Signum	
Discount group		106		106	

Code no.	d1 (h10)	d2 (h6)	d3	l1	l2	l3	c	Z	Availability	
	mm	mm	mm	mm	mm	mm	mm x 45°			
4.000 NEW	4.000	6.000	3.800	57.00	11.00	18.00	0.040	4	●	●
5.000 NEW	5.000	6.000	4.800	57.00	13.00	18.00	0.050	4	●	●
5.700	5.700	6.000	5.500	57.00	13.00	19.60	0.060	4	●	●
6.000 NEW	6.000	6.000	5.700	57.00	13.00	20.00	0.060	4	●	●
7.700	7.700	8.000	7.400	63.00	19.00	25.50	0.080	4	●	●
8.000 NEW	8.000	8.000	7.700	63.00	19.00	26.00	0.080	4	●	●
9.700	9.700	10.000	9.400	72.00	22.00	30.50	0.100	4	●	●
10.000 NEW	10.000	10.000	9.500	72.00	22.00	30.00	0.100	4	●	●
11.700	11.700	12.000	11.200	83.00	26.00	35.30	0.120	4	●	●
12.000 NEW	12.000	12.000	11.500	83.00	26.00	36.00	0.120	4	●	●
13.700	13.700	14.000	13.200	83.00	26.00	35.30	0.140	4	●	●
14.000 NEW	14.000	14.000	13.500	83.00	26.00	36.00	0.140	4	●	●
15.600	15.600	16.000	15.100	92.00	32.00	41.20	0.160	4	●	●
16.000 NEW	16.000	16.000	15.500	92.00	32.00	42.00	0.160	4	●	●
19.500	19.500	20.000	19.000	104.00	38.00	51.10	0.200	4	●	●
20.000 NEW	20.000	20.000	19.500	104.00	38.00	52.00	0.200	4	●	●

GUHRING

GUHRING KG | Telephone: +49 74 31 17 - 0 | Fax: +49 74 31 17 - 21 279

Herderstrasse 50 - 54 | 72458 Albstadt | Germany | info@guehring.de | www.guehring.de

No liability can be accepted for printing errors or technical changes of any kind.
Our Conditions of Sale and Terms of Payment apply. Available on request.

GUHRING

Program now
enhanced
by full size
diameters

RF 100
diver



DRILLING

RAMPING

ROUGHING

SLOTING

FINISHING

RAMMING

- + Plunge angle up to 45°
- + Very good chip removal

APPLICATION EXAMPLE

Wet machining in 42CrMo4
Plunge angle = 30°



$a_p = 12 \text{ mm}$
 $a_e = 11.7 \text{ mm}$
 $v_c = 200 \text{ m/min}$

$v_f = 1200 \text{ mm/min}$

ROUGHING

- + Thanks to low power consumption also suitable on less rigid machines
- + Up to 100% increased cutting speed in steel
- + High metal removal rate

APPLICATION EXAMPLE

Dry machining in steel 42CrMo4

$a_p = 24 \text{ mm}$
 $a_e = 3 \text{ mm}$
 $v_c = 280 \text{ m/min}$




$v_f = 3050 \text{ mm/min}$

Metal removal rate $Q = 219 \text{ cm}^3/\text{min}$



FINISHING

- + Contours with high surface quality
- + Up to 100% increased tool life
- + High cutting parameters also in alloyed heat-treatable steels

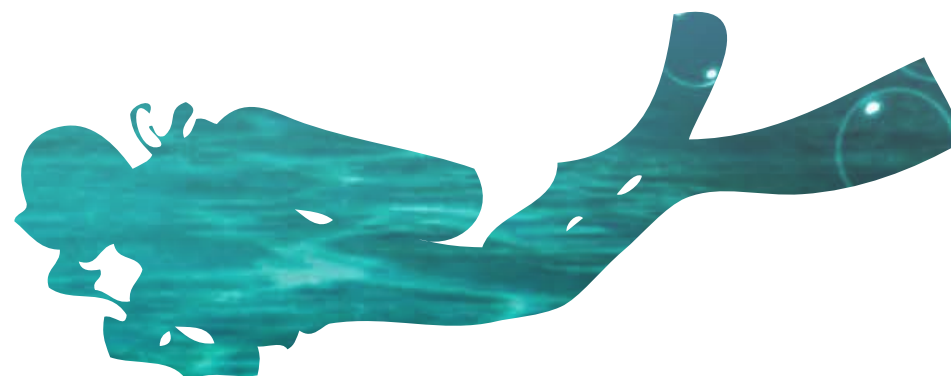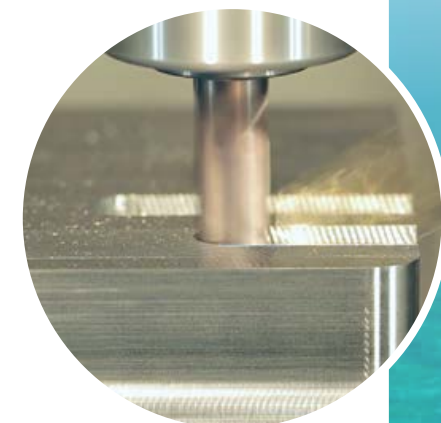

DRILLING

- + Very good drilling characteristics to 2xD
- + Ideal pre-drilling tool for reamers
- + No separate pilot tool necessary

APPLICATION EXAMPLE

Dry machining in cast iron

$a_p = 12 \text{ mm}$
 $a_e = 12 \text{ mm}$
 $v_c = 240 \text{ m/min}$

$v_f = 800 \text{ mm/min}$



SLOTING

- + High feed rate for plunging and slotting
- + High metal removal rate and undersize diameter for precision slots
- + High process reliability with smooth operation

APPLICATION EXAMPLE

Dry machining in steel 42CrMo4

$a_p = 12 \text{ mm}$
 $a_e = 11.7 \text{ mm}$
 $v_c = 240 \text{ m/min}$

$v_f = 1800 \text{ mm/min}$

Metal removal rate $Q = 252 \text{ cm}^3/\text{min}$

Plunging* and Ramping*

Material / ISO Material	Hardness	Drilling depth* (a_p max.)	Ramping* max. angle in °	Cutting speed. (v_c)	f_z (mm/z) with nom. Ø						
					4	6	8	10	12	16	20
Struct./free-cutt. steels, unall. heat-treat./case hard. steels	< 850 N/mm ²	1xd	45°	270	0.015	0.020	0.030	0.040	0.045	0.050	0.060
P Free-cutting steels, unalloyed case hard. steels, nitr. steels	850 - 1200 N/mm ²	1xd	45°	240	0.012	0.015	0.020	0.035	0.040	0.045	0.050
Alloyed heat-treatable, tool and high speed steels	850 - 1400 N/mm ²	1xd	30°	200	0.008	0.010	0.015	0.025	0.030	0.035	0.040
M Stainless steel - easy to machine / sulphured	< 750 N/mm ²	1xd	10°	60	0.008	0.010	0.015	0.025	0.030	0.035	0.040
Stainless steel - moderately difficult to machine	> 750 - 950 N/mm ²	0.5xd	5°	50	0.008	0.010	0.015	0.020	0.025	0.030	0.035
K Cast iron, grey cast iron, spher. graphite/mall. cast iron	> 240 HB 30	1xd	45°	150	0.015	0.020	0.030	0.040	0.045	0.050	0.060
N Aluminium, Al-wrought alloys, Al-alloys	< 3% Si	1xd	30°	180	0.012	0.015	0.020	0.035	0.040	0.045	0.050
Aluminium-cast alloys	> 3% Si	1xd	45°	140	0.015	0.020	0.030	0.040	0.045	0.050	0.060
S Titanium, titanium alloys	< 1400 N/mm ²	0.5xd	10°	45	0.008	0.010	0.015	0.020	0.025	0.030	0.035

* peripheral cooling „Guhrojet“ recommended for optimal chip evacuation and tool life

Slotting*

Material / ISO Material	Hardness	Cutting depth (a_p)	Cutting width (a_e)	Cutting speed. (v_c)	f_z (mm/z) with nom. Ø						
					4	6	8	10	12	16	20
Struct./free-cutt. steels, unall. heat-treat./case hard. steels	< 850 N/mm ²	1xd	1xd	270	0.018	0.025	0.035	0.050	0.060	0.080	0.100
P Free-cutting steels, unalloyed case hard. steels, nitr. steels	850 - 1200 N/mm ²	1xd	1xd	240	0.018	0.025	0.035	0.050	0.060	0.080	0.100
Alloyed heat-treatable, tool and high speed steels	850 - 1400 N/mm ²	1xd	1xd	200	0.018	0.025	0.030	0.045	0.050	0.070	0.085
M Stainless steel - easy to machine / sulphured	< 750 N/mm ²	1xd	1xd	120	0.015	0.020	0.030	0.040	0.060	0.065	0.075
Stainless steel - moderately difficult to machine	> 750 - 950 N/mm ²	1xd	1xd	80	0.015	0.020	0.030	0.040	0.045	0.060	0.070
K Cast iron, grey cast iron, spher. graphite/mall. cast iron	> 240 HB 30	1xd	1xd	160	0.018	0.025	0.035	0.050	0.060	0.080	0.100
N Aluminium, Al-wrought alloys, Al-alloys	< 3% Si	1xd	1xd	500	0.020	0.030	0.040	0.065	0.080	0.095	0.110
Aluminium-cast alloys	> 3% Si	1xd	1xd	340	0.015	0.020	0.030	0.055	0.065	0.080	0.100
S Titanium, titanium alloys	< 1400 N/mm ²	1xd	1xd	60	0.015	0.020	0.030	0.040	0.045	0.060	0.070

* peripheral cooling „Guhrojet“ recommended for optimal chip evacuation and tool life

HPC-Roughing* and HSC-Finishing**

Material / ISO Material	Hardness	Cutting depth (a_p)	Cutting width** (a_e)	Cutting speed. (v_c)	f_z (mm/z) with nom. Ø						
					4	6	8	10	12	16	20
Struct./free-cutt. steels, unall. heat-treat./case hard. steels	< 850 N/mm ²	2xd	0.4xd	350	0.020	0.030	0.045	0.060	0.075	0.090	0.110
P Free-cutting steels, unalloyed case hard. steels, nitr. steels	850 - 1200 N/mm ²	2xd	0.4xd	290	0.020	0.030	0.045	0.060	0.075	0.090	0.110
Alloyed heat-treatable, tool and high speed steels	850 - 1400 N/mm ²	2xd	0.3xd	240	0.018	0.025	0.030	0.055	0.070	0.085	0.100
M Stainless steel - easy to machine / sulphured	< 750 N/mm ²	2xd	0.3xd	140	0.018	0.025	0.035	0.055	0.065	0.080	0.090
Stainless steel - moderately difficult to machine	> 750 - 950 N/mm ²	2xd	0.25xd	120	0.015	0.020	0.030	0.045	0.050	0.065	0.075
K Cast iron, grey cast iron, spher. graphite/mall. cast iron	> 240 HB 30	2xd	0.4xd	180	0.015	0.030	0.045	0.060	0.075	0.090	0.110
N Aluminium, Al-wrought alloys, Al-alloys	< 3% Si	2xd	0.5xd	600	0.030	0.040	0.060	0.080	0.100	0.120	0.150
Aluminium-cast alloys	> 3% Si	2xd	0.4xd	420	0.020	0.030	0.045	0.060	0.075	0.090	0.110
S Titanium, titanium alloys	< 1400 N/mm ²	2xd	0.4xd	120	0.015	0.020	0.030	0.045	0.050	0.065	0.075

* peripheral cooling „Guhrojet“ recommended for optimal chip evacuation and tool life

** for HSC machining the cutting speed can be increased by 50%, feed rate f_z can be reduced depending on surface requirements.

*** for trochoidal milling and imachining with $a_e = 0.1-0.2xd$ the cutting speed v_c and the eed rate can be increased by 50 %.

Drilling*

Material / ISO Material	Hardness	Drilling depth* (a_p max.)	Cutting speed. (v_c)	f_z (mm/z) with nom. Ø						
				4	6	8	10	12	16	20
Struct./free-cutt. steels, unall. heat-treat./case hard. steels	< 850 N/mm ²	2xd	270	0.015	0.020	0.030	0.040	0.045	0.050	0.060
P Free-cutting steels, unalloyed case hard. steels, nitr. steels	850 - 1200 N/mm ²	2xd	240	0.010	0.015	0.020	0.035	0.040	0.045	0.050
Alloyed heat-treatable, tool and high speed steels	850 - 1400 N/mm ²	1xd	200	0.008	0.010	0.015	0.025	0.030	0.035	0.040
K Cast iron, grey cast iron, spher. graphite/mall. cast iron	> 240 HB 30	2xd	150	0.015	0.020	0.030	0.040	0.045	0.050	0.060
N Aluminium, Al-wrought alloys, Al-alloys	< 3% Si	1xd	180	0.010	0.015	0.020	0.035	0.040	0.045	0.050
Aluminium-cast alloys	> 3% Si	1xd	140	0.015	0.020	0.030	0.040	0.045	0.050	0.060

* wood pecking recommended from drilling depth 1 x D

** peripheral cooling „Guhrojet“ recommended for optimal chip evacuation and tool life